



## PROFILE ST 50Z and ST 50Z BREAK

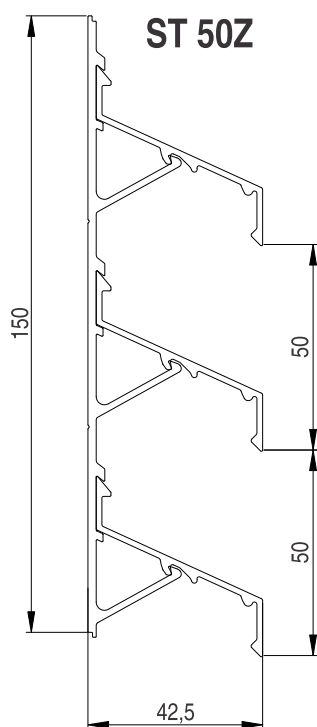

**ST 50Z PROFILE  
GRIP ST50ZG**

**AIR FLOW 62%**

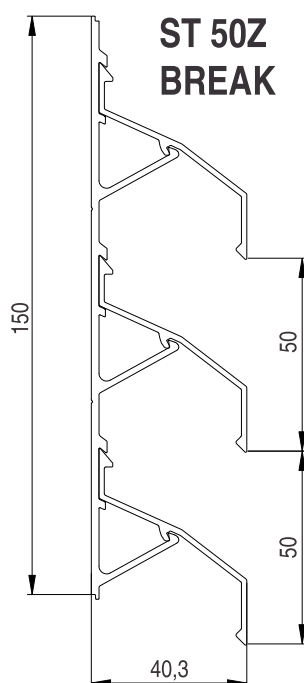

**ST 50Z BREAK PROFILE  
GRIP ST50ZG**

**AIR FLOW 52%**



### PRODUCT DATA SHEET FOR TYPE Z PROFILES

Product pressed from aluminium alloy: grade 6060 or 6063, condition T66 or T6

In accordance with PN-EN 755-9 and PN-EN 573 part 1-4

Tolerance U.N.E. PN-EN 12020 - 2:2010

Surface quality: powder coating to all RAL colours;

natural anodising 15-20 um;

raw aluminium

Width of the grips: standard 30 mm and double 60 mm

other dimensions according to order

Maximum span between supports: for ST 50Z and ST 50Z BREAK - 1.2 m

Standard length of profiles: 6.0 m;

Other dimensions on request:

- special pressing from 4.0 m to 7.0 m

- minimum bending radius for ST50Z  $r=100$  cm

PRICE DEPENDS ON THE VOLUME OF ORDER

OFFER VALID FROM JUNE 2012. PREVIOUS OFFERS EXPIRE WITHIN THIS ONE. We reserve the right to change the scope of the offer

**SOLAR-TECH Sp. z o.o.**

ul. Biskupińska 23, 30-732 Kraków, Poland, tel. (+48 12) 290 04 06, 290 04 07, tel./fax. (+48 12) 653 22 68

TAX ID.NO. 675-12-16-850

Company Registry Number: 357036790

National Court Register: 0000147408