



ALUMINIUM PROFILES

ST 300 A

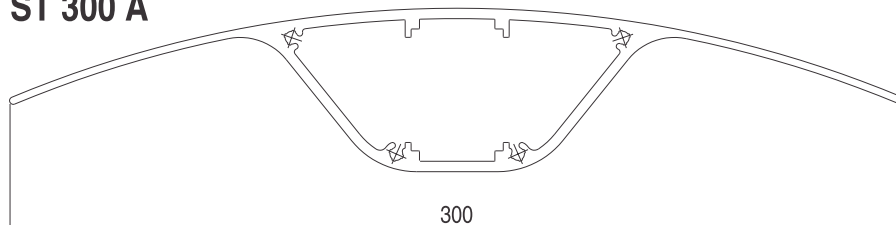

ST 200 A

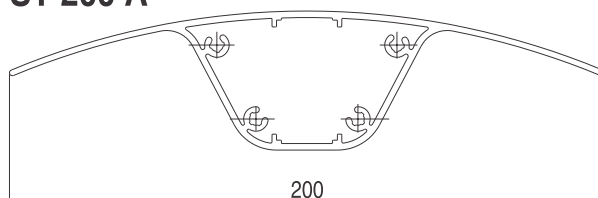

PRODUCT DATA SHEET FOR ST 300A and ST 200A PROFILES

Product pressed from aluminium alloy: grade 6060 or 6063,
condition T66 or T6

in accordance with PN-EN 755-9 and PN-EN 573 part 1-4

Tolerance U.N.E. PN-EN 12020 - 2:2010

Surface quality: powder coating to all RAL colours

natural anodising 15-20 um

raw aluminium

Maximum span between supports:

for ST 300A profile - 3.0 m

for ST 200A profile - 2.8 m

Note: The spans are approximate. When using profiles on high-rise building and buildings designed on open space, characterised by strong draughts, each profile should be counted and adapted to external conditions.

Standard length of profiles: 6.0 m

Other dimensions on request:

- special pressing from 4 m to 7.5 m

PRICE DEPENDS ON THE VOLUME OF ORDER



OFFER VALID FROM JUNE 2012. PREVIOUS OFFERS EXPIRE WITHIN THIS ONE. We reserve the right to change the scope of the offer

SOLAR-TECH Sp. z o.o.

ul. Biskupińska 23, 30-732 Kraków, Poland, tel. (+48 12) 290 04 06, 290 04 07, tel./fax. (+48 12) 653 22 68

TAX ID.NO. 675-12-16-850

Company Registry Number: 357036790

National Court Register: 0000147408